

# Pillowcase Pizazz!

## Fabric Requirements

1/8 yard of trim fabric  
1/3 yard of cuff fabric  
7/8 yard of case fabric

## Cutting Instructions


trim fabric – cut one 2 1/2" by 40 1/2"  
cuff fabric – cut one 9 1/2" by 40 1/2"  
case fabric – cut one 40 1/2" by 26" rectangle

## Sewing Instructions

Use edge of pressure foot for seam allowance guide throughout – 1/4 in seam allowance.

**RST** = right sides together    **WST** = wrong sides together

1. **RST** join short ends of the trim strip to form a circle. Press seam open.
2. **RST** join short ends of cuff strip to form a circle. Press seam open.
3. **WST** fold each circle of fabric together and press.
4. Fold the case rectangle in half **RST** to make a 20 1/4 X 26 rectangle. Sew together the open long edge and across one short edge. Finish seams by zigzagging raw edges. Turn right side out and press.
5. Matching the raw edges and seams, pin the trim fabric to the top edge of the case **RST**. Then pin the cuff fabric on top of the trim fabric **RST**, keeping all edges even.
6. Sew through all layers of fabric. Finish edges by zigzagging raw edges.
7. Turn cuff and trim up and press seam to case. Topstitch along the cuff edge with matching thread.

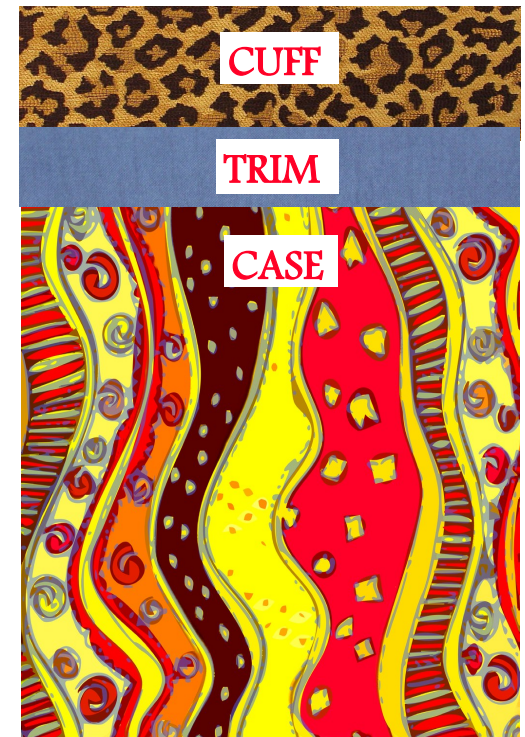

## Possible Donation Locations

Ronald McDonald House  
Child Protective Services  
Children Hospitals  
Homeless Shelters

Texas 4-H Clothing and Textiles 2011 Community Service Project

